

Flanged Bronze Strainer

Type **11502**

Flanged Bronze Strainer, PN16,
Flange connection according to UNI EN 1092-3:2005

11502.2A0 YY
 Screen 0,25 mm

11502.2B0 YY
 Screen 0,60 mm

11502.2C0 YY
 Screen 1 mm



Available options:

Pos	Code	Description
YY	-	Please see chart below


Application Suitable for non-toxic and non- inflammable fluids, gasses and vapors. The laws, regulations and standards are to observe for the range of application.

Working temperatures and pressure
 Up to max. 16.0 bar: -10°C to +120°C
 Up to max. 10.0 bar: -10°C to +160°C
 Up to max. 6.0 bar: -10°C to +220°C

IMPORTANT: When requesting an offer or order, please indicate flow medium, working pressure and working temperature.

Standard marking acc.to Pressure Equipment Directive 2014/68/EU (PED).

Pressure test acc.to EN 12266:2004 – Rate “A”.

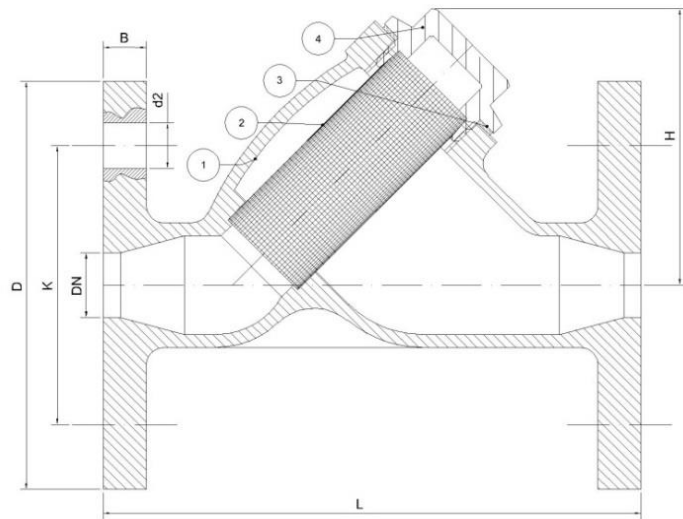

Description	Materials	
1 Body	Bronze	CC491K
2 Screen	Stainless steel	Aisi 302
3 Seal		Silc 4400
4 Plug	Bronze	CC491K

Description	Dimensions [mm]			
Nominal size	DN	50	65	80
Size code	YY	57	58	59
Flange diameter*	D	165	185	200
Distance between holes*	K	125	145	160
Holes diameter*	d2	18	18	18
Width to flange*	B	16	16	18
Height	H	152	180	200
Face-to-face dimension	L	230	265	285

* Dimensions related to Flange PN16 according to UNI EN 1092-3:2005