


# Needle Valve

Type **00104**

**Bronze Needle valve straight pattern, PN40,  
Threaded ends UNI ISO 228-1 :2003**

**00104.111 YY**  
Metal seat

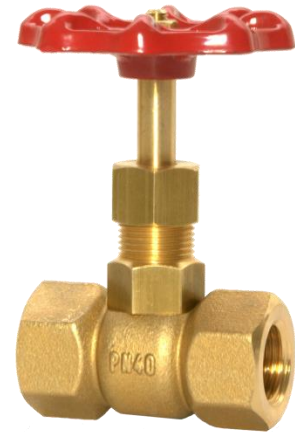

### Available options:

Pos	Code	Description
X	1	Gas thread
YY	-	Please see chart below

**Application** Suitable for non-toxic and non- inflammable fluids, gasses and vapors. The laws, regulations and standards are to observe for the range of application.

**Working temperatures and pressure** Up to max. 16.0 bar: -10°C to +100°C

**IMPORTANT:** When requesting an offer or order, please indicate flow medium, working pressure and working temperature.

Standard marking acc.to Pressure Equipment Directive 2014/68/EU (PED).

Pressure test acc.to EN 12266:2004.

Description	Materials	Seal
		<b>00104.111</b>
1 Seal		Metal
2 Body	Brass	CW614N
3 Bonnet	Brass	CW614N
4 Stem	Brass	CW614N
5 Packing	Graphite packing	AM15/FA
6 Hand wheel	Aluminium - diecasting	

Description	Dimensions [mm]	
Nominal size	NS	1/2"
Size code	YY	04
Height	H	80
Hand wheel-Ø	W	50
Face-to-face dimension	L	50
Wrench size across flat	CH	CH25